


Point Ring Light 8P-RL and 4P-RL

The eight or four regularly arranged fiber light points on the circumference produce a circular illumination towards the center granting an almost homogeneous shadowless illumination of the object field. Flexible light guide in metal tubing with light source connection LA. Direct fixation of the point ring light 8P-RL or 4P-RL on the microscope with a screw or with the support RH which allows an individual height adjustment.

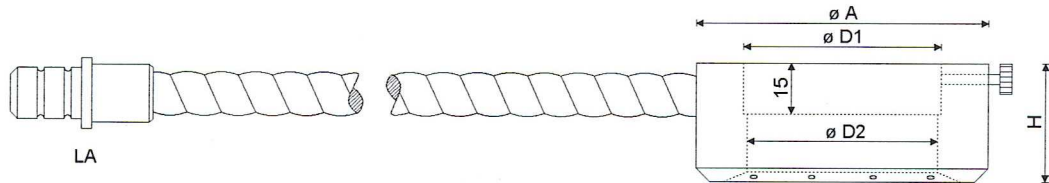


Type	Fiber Points Piece	Fiber Bundle		Fiber Point Ring ϕ mm	Min.Working Distance mm	Dimensions				Flex. Part Length mm	Price CHF
		ϕ mm	mm ²			ϕ D1 mm	ϕ D2 mm	ϕ A mm	H mm		
8P-RL 48	8	6,2	30	55	30	48	50	76	33	750	380.-
8P-RL 50	8	6,2	30	55	30	50	50	76	33	750	380.-
8P-RL 52	8	6,2	30	55	30	52	50	76	33	750	380.-
8P-RL 58	8	6,2	30	65	38	58	58	86	33	750	380.-
8P-RL 60	8	6,2	30	65	38	60	58	86	33	750	380.-
8P-RL 66	8	6,2	30	71	43	66	66	92	35	750	380.-
4P-RL 58	4	8	50	66	40	58	58	86	30	750	410.-
4P-RL 66	4	8	50	74	48	66	66	92	30	750	410.-

- Accessories: Support RH
- Special units available on request

Vertical Light SL

A special microscope light for illumination of drill holes and deepenings. The light point can be radially adjusted within the ring D2. Flexible light guide in metal tubing with light source connection LA. Adapter ring VR to reduce the inside diameter from 66 mm to for instance 50 mm.

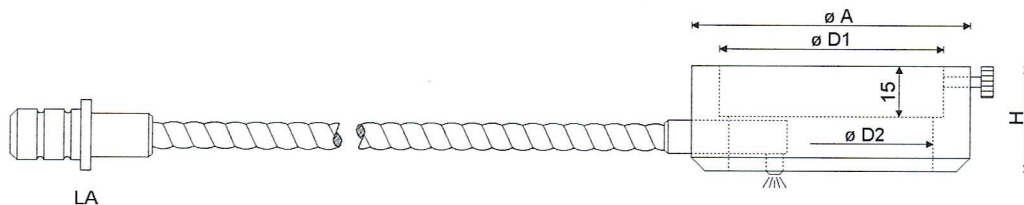

Type	Fiber Bundle		Dimensions				Flexible Part Length mm	Price CHF
	ϕ mm	mm ²	ϕ D1 mm	ϕ D2 mm	ϕ A mm	H mm		
SL 66	4	12	66	60	82	30	750	310.-

- Special units available on request